


Heavy Duty Drive Chain

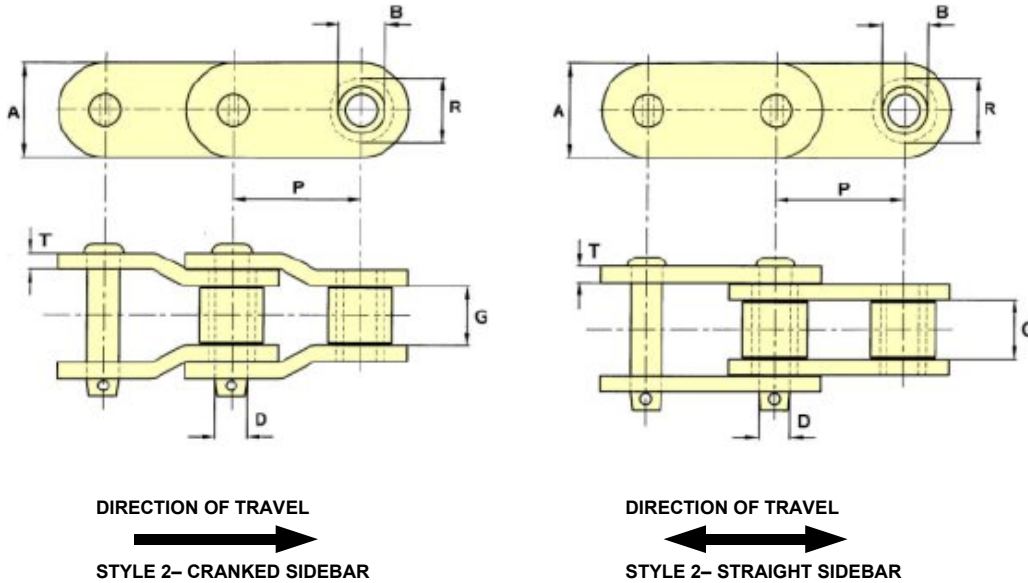

CHAIN NO.	PITCH	ALLOW LOAD	UTS	PIN DIA.	ROLLER DIA	SIDEBAR DEPTH	SIDEBAR THICKNESS	MAX. GEARING	BUSH DIA.	CHAIN WEIGHT	CHAIN STYLE
	P			D	R	A	T	G	B	Lb/ft	
EXS2065	2.000	3,890	65,000	0.59	1.13	1.63	0.31	1.25	0.87	7.6	2
2500X	2.500	5,190	68,000	0.62	1.25	1.63	0.31	1.50	0.91	8.8	2
64S	2.500	7,500	115,000	0.88	1.56	2.38	0.38	1.53	1.21	12.8	1
EXS882	2.609	2,500	28000	0.44	0.87	1.13	0.25	1.13	0.64	3.6	2
EXS402	3.075	4,650	48,000	0.62	1.25	1.5	0.31	1.5	0.88	7.4	2
API3P	3.075	5,100	75,000	0.65	1.25	1.56	0.38	1.5	0.91	8.6	2
1190EXX	3.075	5,100	100,000	0.65	1.25	1.75	0.38	1.5	0.91	8.3	2
3012	3.067	6,000	110,000	0.75	1.63	2.25	0.38	1.56	1.13	13.9	2
3067X	3.067	6,000	110,000	0.75	1.63	2.00	0.38	1.58	1.13	12.0	2
2512	3.067	6,410	115,000	0.75	-	2.13	0.38	1.5	1.25	11.0	2
B7811	3.075	5,100	100,000	0.65	1.25	1.75	0.38	1.5	0.91	8.3	2
E3114	3.090	7,650	140,000	0.88	1.75	2.25	0.50	1.50	0.91	8.3	2
E238R	3.500	7,650	150,000	0.88	1.75	2.25	0.50	1.50	1.25	16.0	2
3514	3.500	7,650	150,000	0.88	1.75	2.25	0.50	1.50	1.25	16.7	2
1664A	4.000	14,700	250,000	1.19	2.25	3.25	0.56	2.19	1.63	28.6	2
API4P	4.063	9,000	150,000	0.88	1.75	2.25	0.50	2.00	1.25	15.7	2
4014	4.063	9,000	150,000	0.88	1.75	2.25	0.50	2.00	1.25	15.7	2
RX1245	4.073	10,050	170,000	0.94	1.78	2.38	0.56	1.94	1.31	18.7	2
4015A	4.073	10,050	170,000	0.94	1.78	2.38	0.56	1.94	1.31	18.7	2
E4073	4.073	11,500	170,000	1.00	1.87	2.75	0.56	1.94	1.31	18.7	2
4016	4.090	11,500	170,000	1.00	1.87	2.75	0.56	1.94	1.31	22.6	2
4016LR	4.090	11,500	170,000	1.00	2.00	2.75	0.56	1.94	1.31	23.3	2
4500A	4.500	12,200	208,000	1.09	2.25	3.00	0.56	2.06	1.63	24.5	2
EXS5026	5.000	16,130	260,000	1.25	2.50	3.25	0.56	2.56	1.88	31.1	2
5020	5.000	17,500	260,000	1.25	2.50	3.50	0.63	2.75	1.88	35.1	2
EXS5027	5.000	17,500	260,000	1.25	2.50	3.50	0.75	2.56	1.88	39.8	2
1605AAA	5.000	21,000	330,000	1.38	2.50	3.50	0.75	2.56	1.88	39.8	2
5022	5.000	21,000	330,000	1.38	2.50	3.50	0.75	2.56	1.88	39.8	2
E1605	5.000	22,200	330,000	1.38	2.50	3.50	0.75	2.75	1.88	40.3	2
EXS5042	5.000	23,700	420,000	1.50	3.00	4.00	0.75	3.00	2.25	51.6	1
5500A	5.500	23,625	400,000	1.50	3.00	4.00	0.75	3.00	2.25	49.8	2
5524	5.500	23,700	420,000	1.50	3.00	4.00	0.75	3.00	2.25	49.8	2
6024	6.000	23,700	420,000	1.5	3.00	4.00	0.75	3.00	2.25	46.4	2
EXS6042	6.000	23,700	420,000	1.50	3.00	4.00	0.75	3.00	2.25	46.4	2